


NOTF:

CUT SIDE SECTION OF CROSSGRIP AS PICTURED. HOT AIR WELD 1" X 6" CROSSGRIP (FTR MEMBRANE) STRAPPING 2-3 INCHES FROM END AND THEN EVERY 3-6FT THEREAFTER. (LEAVE SLACK IN THE STRAPPING TO ALLOW FOR EXPANSION AND CONTRACTION OF THE WALKWAY PAD) (STRAPPING APPLIED IN HIGH WIND AREAS)

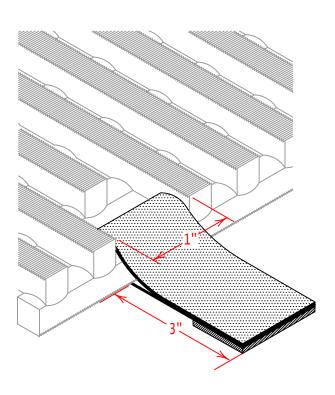

NOTE:

ROLL SIZE - 24" X 33'
CUT TO LENGTH & SHAPE DESIRED



GENERAL REFERENCE:
"FTR GS 01/21"
APPLICABLE SYSTEMS:
"FTR MA 01/21"
"FTR AD 01/21"
"FTR BA 01/21"

FIBERTITE CROSSGRIP WALKWAY W/ CROSSGRIP STRAPPING (HIGH WIND AREA)

REVISES DETAIL	ISSUE DATE	DRAWING NUMBER
ALL PREVIOUS	09-03-21	FTR-DM1e